



A Donaldson Company

A WORLD LEADER IN FUME EXTRACTION TECHNOLOGY

AD Base 2 Oracle

Last Updated on 08.04.2021



The laser companion Advantage extraction system for the laser engraving industries.

The Advantage Base 2 Oracle has been designed so that a number of laser engravers can sit on top of the extractor, effectively doubling it up as a work station.

All the Base units in the range have the option of an onboard compressor for a compact installation. BOFA's easi-glide filter location mechanism makes filter changes easy, quick and safe.

Technology



DeepPleat DUO pre-filter



HEPA filter



Automatic flow control (AFC) technology



Reverse flow air (RFA) technology



Advanced carbon filter (ACF) technology



Multi voltage sensing (MVS) unit



Patented technology



ProTECT service plan



SureCHECK quality standard

Key features of the AD Base 2 Oracle

Auto sensing voltage (90v - 257v) for global use
Standard

DeepPleat DUO pre-filter
Standard

HEPA and gas combined filter
Standard

'Easi-seal' filter location
Standard

VOC gas sensor (Volatile Organic Compound)
Optional

Remote stop / start interface
Optional

Automatic flow control
Standard

Advanced carbon filter technology
Standard

Reverse flow air technology
Standard

Low noise level
Standard

On-board compressor
Optional

Filter change / system fail signal
Optional


Contact BOFA at <https://bofainternational.com/en/contact/>

<https://bofainternational.com/en/portal/datasheets/ad-base-2-oracle/>




Technical Specification

1. Unit / filter condition display - automatic flow control
2. On / off switch
3. Standby button
4. Power cable inlet
5. Castors
6. Door hinge
7. Hose inlet connection - 75mm
8. Exhaust outlet
9. Motor cooling inlet

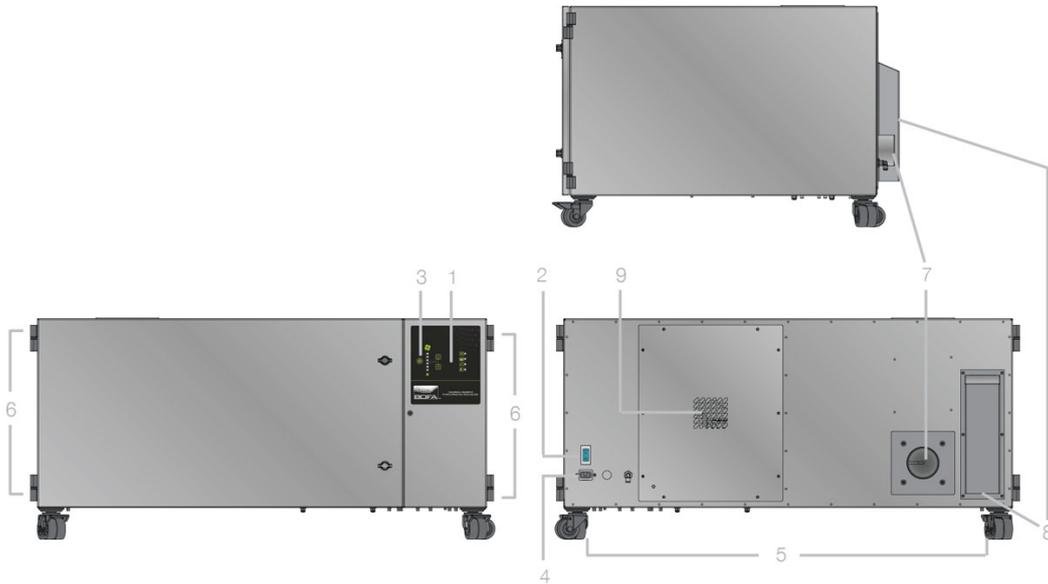

Airflow through filters

-  Chemical filter
-  HEPA filter
-  Pre-filter
-  Clean air
-  Contaminated air
-  Particulate

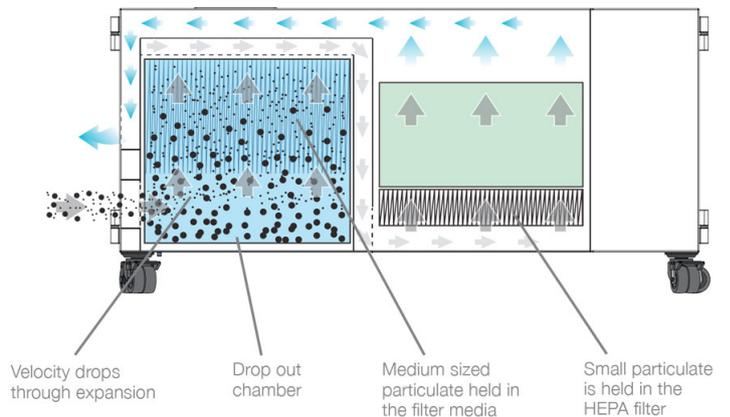

Technical data

	EU
Dimensions (HxWxD)	550mm x 1060mm x 810mm (21.65 x 41.74 x 31.89")
Cabinet construction	Powder coated mild steel
Airflow / pressure	380m ³ /hr / 96mbar (223cfm / 96mbar)
Electrical data	90v - 257v Single-phase 1~ 50/60Hz Full load current: 12.5 amps / 1.1kw
	230v Single-phase 1~ 50/60Hz Full load current: 10 amps
	115v Single-phase 1~ 50/60Hz Full load current: 12 amps
Noise level	< 63dBA (at typical operating speed)

Technical data

Weight	94kg (207lbs)
Approvals	UKCA and CE

DeepPleat DUO pre-filter specifications

Surface media area	12m ² approx (129.12 ² ft)
Filter media	Borosilicate
Filter media construction	Pleated with glue bead spacers
Filter housing	Zintec mild steel
Filter efficiency	95% @ 0.9 microns
Inlet size	75mm (0.24 ft)
Dropout chamber size	16.2 litres
Filter media pleat size	200mm (0.65ft)

Combined filter specifications

HEPA filter media	Borosilicate
HEPA media construction	Maxi pleat construction with glue bead spacers
Filter housing	Zintec mild steel
Treated activated carbon	15kgs (33 lbs)
Filter efficiency	99.997% @ 0.3 microns

Part numbers

Model	Voltage	Part no.	24V stop / start	Filter change / system failure signal	VOC monitoring	Compressor
AD Base 2 Oracle powder coated	90V - 257V	L4944	A2001	A2002	A2003	A2007

Replacement filters

Model	DeepPleat DUO pre-filter	Combined filter
AD Base 2 Oracle	A1030156	A1030155

Other languages

AD Base 2 Oracle
[French](#)

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Think before you print! Please consider the environment before printing this document.

